



## Advanced Multi-button GSM Intercom

The multi-button GSM system is designed to allow for up to 4 residences to be contacted via one entry device. Each button can rollover call to three different phone numbers if the first call goes unanswered.



FOTA – Upgrade firmware via SMS.



Ability to set Do-not-disturb times.



Set automatic gate open & close times.



Trigger, latch and unlatch SMS replies.



2x Relays.



Intercoms with proximity readers are available.




Issue time-restricted keypad codes.



Antenna.

Works with our multi network AESIM.

[aesglobaltelecom.com](http://aesglobaltelecom.com)

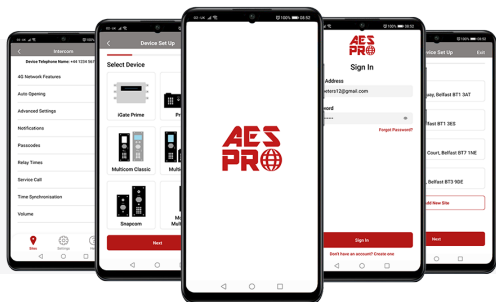

The Prime7 MULTI-BUTTON system is programmable with our AES PRO APP. Available on android and ios.



DETAILS			
Dial Out Numbers	4	Relays	2
Permanent Codes/cards	250	Relay Type	N/C and N/O
Time Restricted Codes/cards	250	Relay Load	2 amps, 24v ac max
Temporary Codes/cards	50	Power Consumption	300mA on dial out, 2amp peak demand
Automatic Trigger Events per Week	50	Modem Models	4G EU, 4G USA, 4G AUS/NZ
Caller ID Numbers	250	Power Supply	24v dc (24v dc 2A adaptor included)
Time Restricted Caller ID Numbers	250	Prox model	125 khz

The multi-button Prime7 is for multi-house/flats. The units are available 2-4 buttons.

Each kit contains, a speech panel, power supply, install manual, sim card options and a high gain antenna.




All panels have white lighting.

### 2 Button system

**PRIME7-IBK2-EU**  
All black panel.

**PRIME7-ISK2-EU**  
Full steel panel.




Area code:  
EU (Europe)  
US (USA)  
AU (Australia & NZ)



### 3 Button system

**PRIME7-IBK3-EU**  
All black panel.

**PRIME7-ISK3-EU**  
Full steel panel.



### 4 Button system

**PRIME7-IBK4-EU**  
All black panel.

**PRIME7-ISK4-EU**  
Full steel panel.

