


AD600

Plug-in module DD600

The AD600 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the DD600 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD600 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or antimasking condition to the alarm output.

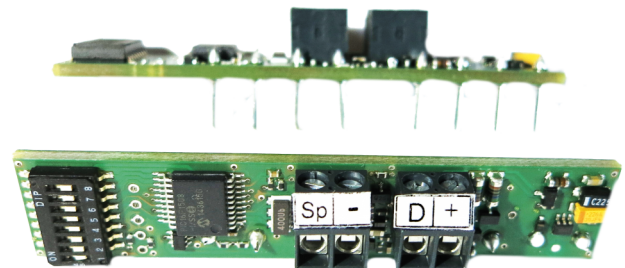

Details

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

AD600

Plug-in module DD600

Technical specifications

General

Accessory group	Motion sensors
Type	Module

Electrical

Operating voltage	9 to 24 VDC
Current consumption	max. 900 μ A

Supply voltage

9 to 24 VDC (12 V nominal)

IADS-bus voltage

12 or 24 VDC

Min. current consumption at 13.4 VDC

400 μ A

Max. current consumption at 13.4 VDC

900 μ A

Bus current consumption out of bus

approx. 75 μ A

Max. current capacity output day/night

200 mA

Max. current capacity output walk test

200 mA

Device type / Category

T3 / PIR

Address range

0 to 31

