

# Addressable Detection

Power & Communications  
via

Two-Wire Addressable  
Multiplex Loop

## AMP-700 Series Contact Modules

Turn ordinary detectors into  
*ADDRESSABLE DEVICES!*

Flexible  
to fit a host of  
applications!

For use with :

**MAXSYS®**

Hybrid Addressable Security System

and

**Power832 & 864**

Security Systems Equipped with PC5100 Module




© 1999 Digital Security Controls Ltd.  
Toronto, Canada  
www.dscgrp.com




### AMP-700 Magnetic Door/Window Contact

- Magnetic contact with internal tamper switch to monitor both alarm and tamper states

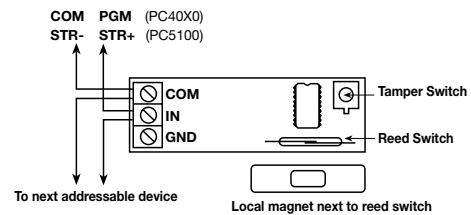


### AMP-701 Contact Input Module

- Connect an external device to monitor alarm, tamper, and trouble
- External devices must have N/C dry contact outputs

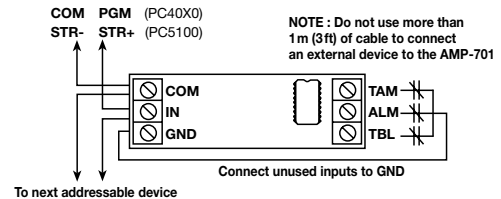

### AMP-702 Fire Point Module

- Has a 5.6Ω EOL supervised loop that monitors N/O contacts
- An open on the loop initiates a trouble and a short initiates an alarm

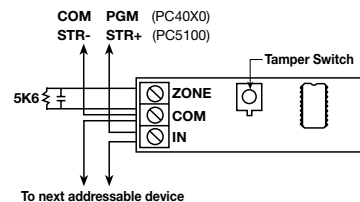

### Specifications AMP-700 Series

	700 & 701		702	
	Standby	In Alarm	Standby	In Alarm
• Current rating.....	0.8mA		1.1mA	1.6mA
• Operating environment .....	32 to 120°F (0 to 49°C) 5%-95% non-condensing			
• Dimensions.....	3 3/8" L x 1 1/8" W x 3/4" D (8.5 x 2.7 x 1.9cm)			