


CODE: **AWO006 v1.0**  
 NAME: **7/TRP40/SATEL**

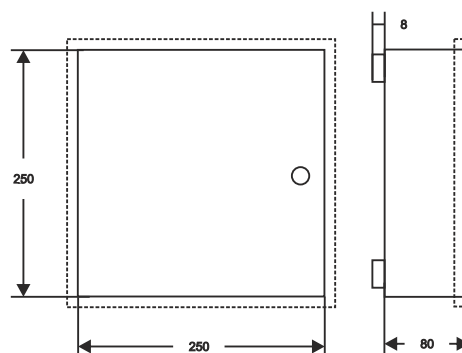

## DESTINATION

**CONTROL PANELS:** CA 4V1, CA5, CA6, CA10, VERSA 5,10,15, INTEGRA 24, 32

**MODULES:** CA64 ( PP, EPS, ADR, O- R, O- ROC, O- OC, OPS- OC, OPS-R, OPS- ROC, VGM- 16, SR, PTSA, ACC- KP- PS)

## TECHNICAL DATA

<b>Dimensions:</b>	<b>internal:</b> W=250, H=250, D=80 <b>external:</b> W1=255, H1=255, D1=88mm [mm, +/-2]
<b>Weight net/gross:</b>	2,40kg / 2,55kg [ +/-0,1kg]
<b>Battery space:</b>	7Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	TRP 40VA/16V/18V in the case of PC / ABS, in class UL94-V0, IP20
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
<b>Operating environment:</b>	class II , -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5A@50V/DC max. NC
<b>Closing:</b>	screwed x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
<b>Certification, declaration:</b>	CE, RoHS