

DH-CS4226-24ET-375

26-Port Cloud Managed Desktop Switch with 24-Port PoE



Series Overview

Highly intuitive, the Smart Managed Switch can manage local networks. With the DoLynk Care platform, it can also perform cloud management. The switch performs operation and maintenance using topology visualization on front-end, transmission and back-end storage devices that are in the security system and IT system. With its full metal design, the switch has great heat dissipation and can operate in temperatures ranging -10°C to 55°C. It offers EMC and has protection against overvoltage, overcurrent, static electricity, lightning strikes, pulses and other types of interference. For the PoE series Smart Managed Switch, power is supplied up to 250 meters away. The orange port supplies up to 60 W and the red port provides up to 90 W. Also, link aggregation and STP are available on select models to ensure the network remains stable. The switch can be used in small and medium-sized businesses such as supermarkets, offices, restaurants, cafés and hotels.

Functions

Cloud Management

Devices can be managed through the DoLynk Care app and performs real-time monitoring of the network. The app also displays the status of devices, triggers alarms for errors in real time and sends notifications.

Network Topology Management

Supports the LLDP protocol and is able to generate and display the network topology, so that you can quickly identify issues, and perform operation and maintenance remotely on devices that are in the topology.

BT 90W (Red Port)

The red ports support IEEE802.3af, IEEE802.3at, IEEE802.3bt and Hi-PoE standards, with a maximum output power consumption of 90W per port. Suitable for powering high-power devices.

- Meets the requirements of IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z standards.
- Meets the requirements of IEEE802.3af, IEEE802.3at, Hi-PoE, and IEEE802.3bt power supply standards.
- Manages PoE power consumption and PoE power on/off. Supports Intelligent PoE.
- A wide operating temperature range and a full metal casing that is fully-enclosed and dust-proof.



Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

PoE Watchdog

Adopts the innovative PoE Watchdog. PoE Watchdog can be switched on by dialing/turning on the WEB page switch. It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its true sense and effectively reduces manual maintenance costs.

Loop Protection


When a loop is detected, the loop alarm will be triggered and the elimination mechanism will activate to prevent broadcast storms from occurring.

Scene


Suitable for scenes such as houses, factories and offices.

Smart Managed Switch | DH-CS4226-24ET-375

Technical Specification		Equipment Management	Web management; App management
Hardware			
Included Power Adapter	Yes	Statics Protection	Air discharge: 8 kV; Contact discharge: 6 kV
PoE	Yes	Lighting Protection	Common mode: 4 kV; Differential mode: 2 kV
Ethernet Port	24	Net Weight	2.62 kg (5.76 lb)
Ethernet Port Speed	10/100 Mbps	Gross Weight	3.22 kg (7.08 lb)
Optical Port Speed	1000 Mbps	Product Dimensions	440 mm × 220 mm × 44 mm (17.32" × 8.66" × 1.73") (L × W × H)
Ethernet Port Uplink Speed	10/100/1000 Mbps	Packaging Dimensions	540 mm × 342 mm × 90 mm (21.26" × 13.46" × 3.54") (L × W × H)
Optical Port Uplink Speed	1 Gbps	Casing Material	Sheet metal
Description of Function Slots	Port 1-24: 24 × RJ-45 10/100 Mbps (PoE); Port 25-26: 2 × RJ-45 10/100/1000 Mbps (combo); Port 25-26: 2 × SFP 1000 Mbps (combo)	Installation	Desktop mount; rack mount
Reset Button	1	Ordering Information	
Power Supply	Built-in power supply: 100-240 VAC, 47-63 Hz, max 7 A	Type	Model
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)	PoE Switch	DH-CS4226-24ET-375
Operating Humidity	5%–95% (RH), non-condensing	Description	
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)	26-Port Cloud Managed Desktop Switch with 24-Port PoE	
Storage Humidity	5%–95% (RH), non-condensing		
Power Consumption	Idling: ≤8.5 W ; Full load: 400 W	Installation	
Performance			
Layer	Layer 2		
Management Type	Yes		
Smart Managed Switch	Yes		
MTBF	64.20 years		
Switching Capacity	8.8 Gbps		
Packet Forwarding Rate	6.55 Mpps		
Packet Buffer Size	4 Mbit		
Jumbo Frame	15K Byte		
MAC Table Size	8K		
VLAN Number	32		
Communication Standard	IEEE802.3; IEEE802.3u; IEEE802.3x; IEEE802.3ab; IEEE802.3z		
Feature			
PoE Protocol	IEEE802.3af; IEEE802.3at; Hi-PoE; IEEE802.3bt		
PoE Power	Port 1-2 ≤ 90 W, Port 3-24 ≤ 30 W, total ≤ 375 W		
PoE Power Consumption Management	Yes		
PoE Pin Assignment	1,2,4,5 (V+), 3,6,7,8 (V-)		
Long Distance PoE Transmission	Yes		
VLAN Function	Port-based VLAN		
IEEE 802.3x Flow Control	Yes		
DHCP Function	DHCP Client		

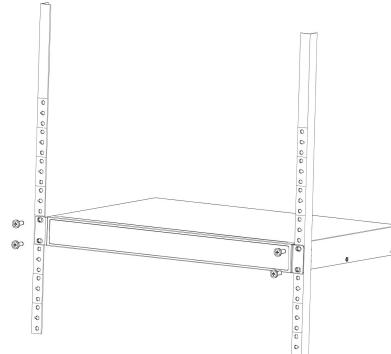

Dimensions (mm[inch])

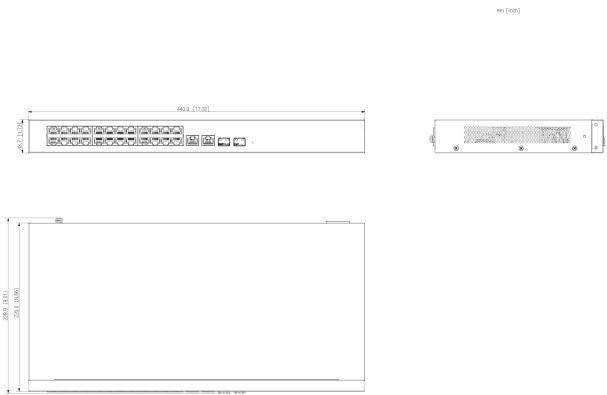

Panels

