

DEXIA ARTIC

Cod. DZSA36

**IP65****Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 1000-800-650-500 lm. N.2 rechargeable LiFePO₄ batteries @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.

Description


Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	11 W
Maximum absorbed power in VA	17 VA
Battery	N.2 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	1000-800-650-500 lm
Lum. flux in Maintained mode	1000 lm

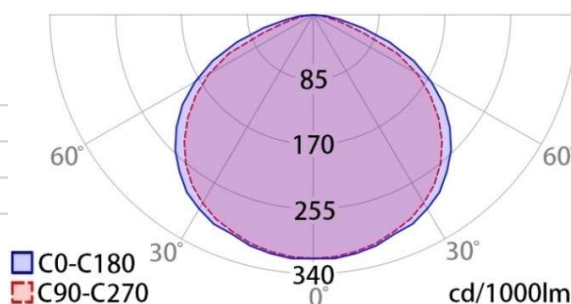

DEXIA ARTIC

Cod. DZSA24

**IP65****Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 510-410-340-260 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.

Description


Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	Standard
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	8.5 VA
Battery	N.1 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	510-410-340-260 lm
Lum. flux in Maintained mode	510 lm

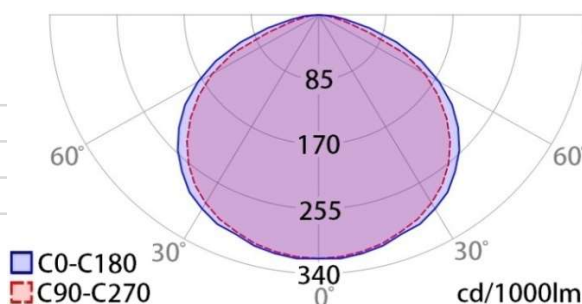

DEXIA ARTIC

Cod. DZAA36

**IP65****Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 1000-800-650-500 lm. N.2 rechargeable LiFePO₄ batteries @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.


Description

Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	11 W
Maximum absorbed power in VA	17 VA
Battery	N.2 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	1000-800-650-500 lm
Lum. flux in Maintained mode	1000 lm

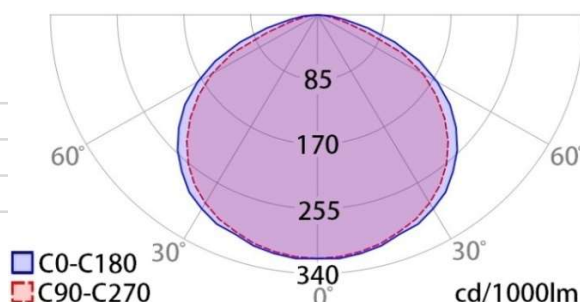**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz

DEXIA ARTIC

Cod. DZAA24

**IP65****Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 510-410-340-260 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H. Function/Malfunction signalling LEDs. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.

Description


Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	Self-Test (Self-diagnosis)
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	8.5 VA
Battery	N.1 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Additional information	Dedicated terminals for inhibit mode and rest mode
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	510-410-340-260 lm
Lum. flux in Maintained mode	510 lm

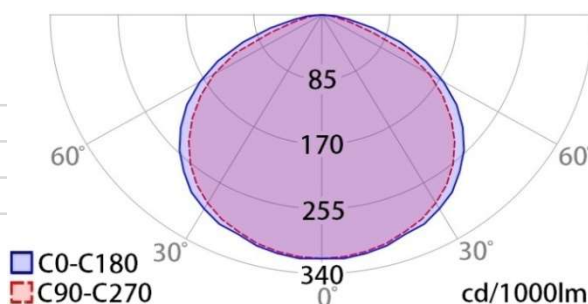**INIM ELECTRONICS s.r.l.**

Via dei Lavoratori, 10 Loc. Centobuchi 63076 Montepreandone (AP) ITALY
Tel. +39 0735 705007 Fax +39 0735 704912 info@inim.biz www.inim.biz



DEXIA ARTIC

Cod. DZBA36

**IP65****Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 1000-800-650-500 lm. N.2 rechargeable LiFePO₄ batteries @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H.

Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.

Description


Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	11 W
Maximum absorbed power in VA	17 VA
Battery	N.2 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H

Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	1000-800-650-500 lm
Lum. flux in Maintained mode	1000 lm

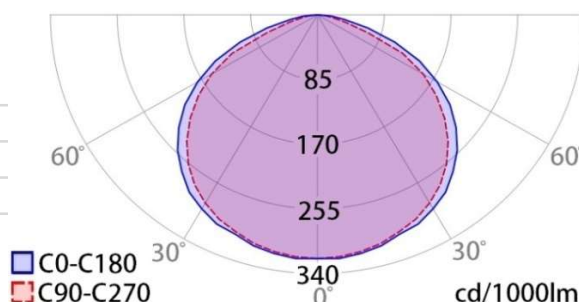

DEXIA ARTIC

Cod. DZBA24

**Introduction**

DEXIA ARTIC series self-contained LED emergency light with self-extinguishing RAL9003 white polycarbonate body, ultrasound-welded self-extinguishing transparent polycarbonate screen. Wall, ceiling and flush mount installation. Power supply 220/230 Vac, 50-60 Hz. Type Non-Maintained or Maintained; luminous flux in emergency 510-410-340-260 lm. Rechargeable LiFePO₄ battery @ 3.3 Ah included; charging time 12 H; selectable autonomy 1 - 1.5 - 2 - 3 H. Function/Malfunction signalling LEDs. Integrated module for centralized diagnosis. Protection rating IP65, double insulated, operating temperature -30 °C ÷ 50 °C. Dimensions: 322 x 140 x 50 mm.

Description

Product series	DEXIA ARTIC
Product type	Emergency luminaire
Version	BUS supervised
Type	Non-Maintained, Maintained
Dimensions	Height 140 mm, Length 322 mm, Depth 50 mm

Technical specifications

Installation	Wall, ceiling, surface/false ceiling mount
Power supply	220/230 V~, 50-60 Hz
Absorbed power in W	5.5 W
Maximum absorbed power in VA	8.5 VA
Battery	N.1 EXTENDED TEMP. LiFePO ₄ 3.2 V 3.3 Ah
Autonomy	1 H - 1.5 H - 2 H - 3 H
Total charging time	12 H
Body	White Polycarbonate RAL9003
Glow wire	850 °C
Screen	Ultrasound-welded transparent Polycarbonate
IP Protection rating	IP65
IK Protection rating	IK07
Insulation class	II
Operating temperature	-30 °C ÷ 50 °C
Maintained mode information	Dedicated terminal 230 V~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547, EN 55015 EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-7, EN 62034

Light source	LED
Colour temperature	5700K
Luminous flux in emergency	510-410-340-260 lm
Lum. flux in Maintained mode	510 lm

