



ISB1011



IT Sirena/base convenzionale a basso consumo


EN Conventional sounder base low power range



0051
0051-CPR-2038

EN 54-3

inim
ELECTRONICS
Centobuchi, via Dei Lavoratori 10
63076 Montepandone (AP), Italy
+39 0735 705007
+39 0735 734912
info@inim.biz
www.inim.biz

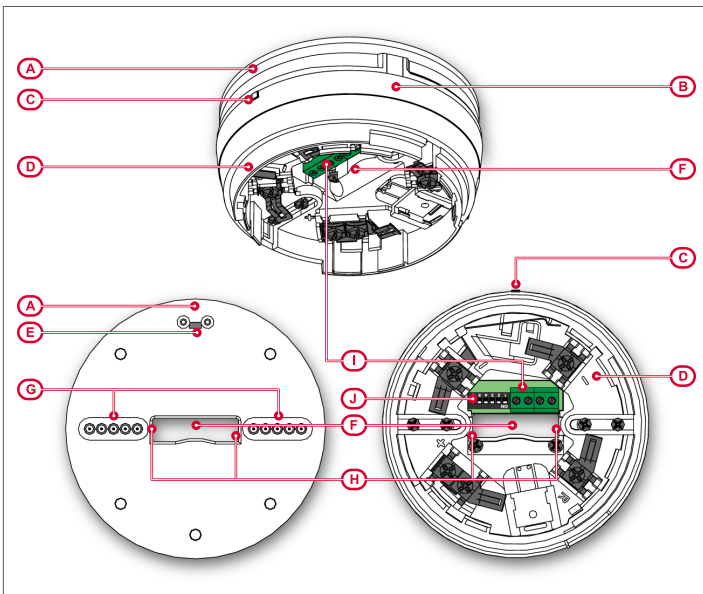

Descrizione delle parti

A	Staffa di ancoraggio	G	Fori pretranciati per ancoraggio
B	Sirena	H	Ganci fissaggio staffa
C	LED	I	Morsettiera
D	Base per rivelatori	J	DIP switch
E	Fissaggio supporto etichetta rivelatore		
F	Foro passacavi		

Morsettiera

+	Terminale positivo
-	Terminale negativo

DIP switch

Switch	ON	OFF
1		
2	Selezione dei toni (vedi tabella Tones)	
3		
4		
5	Potenza lampeggiatore	
	alta	bassa
6	Potenza sonora	
	alta	bassa

La posizione di default dei DIP switch è la seguente:

ON	1	2	3	4	5	6
OFF	≡	≡	≡	≡	≡	≡

Con tale impostazione la sirena utilizza la programmazione di default.

Marcatura CE

 0051 INIM Electronics s.r.l. Via Dei Lavoratori 10 - Fraz. Centobuchi 63076 Montepandone (AP) - Italy 20 0051-CPR-2038 EN 54-3:2001 + A1:2002 + A2:2006 ISB1011 Base sirena convenzionale per sistemi di rivelazione e di segnalazione d'incendio per edifici		
Caratteristiche essenziali	Prestazione	
Affidabilità di funzionamento	PASS	
Tolleranza al voltaggio di alimentazione	PASS	
Durabilità dell'affidabilità di funzionamento:	Resistenza termica	PASS
	Resistenza a urti e vibrazioni	PASS
	Resistenza all'umidità	PASS
	Resistenza alla corrosione	PASS
	Stabilità elettrica	PASS
	Resistenza all'ingresso	PASS
Caratteristiche essenziali		Prestazione
C.3.2 Sincronizzazione		PASS
Caratteristiche essenziali		Prestazione
4.3.7 Sincronizzazione		PASS

Avvertenze e limitazioni

- Il dispositivo è conforme all'opzione "sincronizzazione" delle norme EN54-3 per mezzo di un oscillatore al quarzo di opportuna precisione.
- I toni e le sequenze certificati sono evidenziati nella colonna "EN54-3 approved" della tabella in appendice "Tones".

Dati del costruttore

Costruttore: Inim Electronics S.r.l.
Sito di produzione: Centobuchi, via Dei Lavoratori 10
63076 Montepandone (AP), Italy
Tel: +39 0735 705007
Fax: +39 0735 734912
e-mail: info@inim.biz
Web: www.inim.biz

Il personale autorizzato dal costruttore a riparare o sostituire qualunque parte del sistema, è autorizzato ad intervenire solo su dispositivi commercializzati con il marchio Inim Electronics.

Circa questo manuale

Codice del manuale: DCMIIN1PISB1011

Revisione: 100

Copyright: le informazioni contenute in questo documento sono proprietà esclusiva della Inim Electronics S.r.l. Nessuna riproduzione o modifica è permessa senza previa autorizzazione della Inim Electronics S.r.l. Tutti i diritti sono riservati.

RAEE



Ai sensi dell'art. 26 del Decreto Legislativo 14 marzo 2014, n. 49 "Attuazione della direttiva 2012/19/UE sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE)"

Il simbolo del cassonetto barrato riportato sull'apparecchiatura o sulla sua confezione indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura giunta a fine vita agli idonei centri comunali di raccolta differenziata dei rifiuti elettronici ed elettronici. In alternativa alla gestione autonoma è possibile consegnare l'apparecchiatura che si desidera smaltire al rivenditore, al momento dell'acquisto di una nuova apparecchiatura di tipo equivalente. Presso i rivenditori di prodotti elettronici con superficie di vendita di almeno 400 m² è inoltre possibile consegnare gratuitamente, senza obbligo di acquisto, i prodotti elettronici da smaltire con dimensioni inferiori a 25 cm. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento e allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce l'impiego e/o riciclo dei materiali di cui è composta l'apparecchiatura.

EN

Product description

The tone played in the event of activation and the relative sound power must be selected by means the inner DIP switches.

For the list of tones, refer to the tables in the appendix.

Technical specifications (according to EN 54-3)

Input voltage	
range	from 20 to 30 V ~
nominal	24 ~
Consumption	
at rest	500µA
maximum	in alarm (see Tones table)
Environmental operating conditions	
Temperature	from -10 to +55 °C
Relative humidity	≤ 75 % without condensation
Environmental type	A (indoor use)
Protection class	IP21
Installation method	ceiling mount
Dimensions (HxWxD)	112 x 112,5 x 53,3 mm
Weight	200 g



Description of the parts

A	Fixing bracket	G	Pre-cut mounting holes
B	Sounder	H	Bracket clips
C	LED	I	Terminal block
D	Base for detectors	J	DIP switches
E	Detector label support fixture		
F	Cable hole		

Terminal board

+	Positive terminal
-	Negative terminal

DIP switches

Switches	ON	OFF
1		
2	Tones selection	
3	(see table Tones)	
4		
5	Flasher power	
	high	low
6	Audio power	
	high	low

Following default DIP switches positions:

	1	2	3	4	5	6
ON						
OFF						

By this settings, the sounder uses default programming.

CE mark

	
0051	
INIM Electronics s.r.l. Via Dei Lavoratori 10 - Fraz. Centobuchi 63076 Montepandone (AP) - Italy 20 0051-CPR-2038	
EN 54-3:2001 + A1:2002 + A2:2006	
ISB1011	
Conventional sounder base for fire detection and fire alarm systems installed in buildings	
Essential characteristics	Performance
Operational reliability	PASS
Tolerance to supply voltage	PASS
Durability of operational reliability:	Temperature resistance
	Vibration resistance
	Humidity resistance
	Corrosion resistance
	Electrical stability
	Access to the inside housing resistance
Essential characteristics	Performance
C.3.2 Synchronization	PASS
Essential characteristics	Performance
4.3.7 Synchronization	PASS

Manufacturer's details
Manufacturer: Inim Electronics S.r.l.
Production plant: Centobuchi, via Dei Lavoratori 10
63076 Montepandone (AP), Italy
Tel: +39 0735 705007
Fax: +39 0735 734912
e-mail: info@inim.biz
Web: www.inim.biz

The persons authorized by the manufacturer to repair or replace the parts of this system, hold authorization to work on Inim Electronics brand devices only.

Warnings and limitations

- This device complies with "synchronization requirements" according to EN54-3 standards by means of a crystal oscillator with suitable accuracy.
- The certified tones and sequences are highlighted in the "EN54-3 approved" column of the table in the appendix "Tones".

About this manual

Manual code: DCMIIN1PISB1011

Revision: 100

Copyright: the information contained in this document is the sole property of Inim Electronics S.r.l. No part may be copied without written authorization from Inim Electronics S.r.l.. All rights reserved.

WEEE



Informative notice regarding the disposal of electrical and electronic equipment (applicable in countries with differentiated waste collection systems)
The crossed-out bin symbol on the equipment or on its packaging indicates that the product must be disposed of correctly at the end of its working life and should never be disposed of together with general household waste. The user, therefore, must take the equipment that has reached the end of its working life to the appropriate civic amenities site designated to the differentiated collection of electrical and electronic waste. As an alternative to the autonomous management of electrical and electronic waste, you can hand over the equipment you wish to dispose of to a dealer when purchasing new equipment of the same type. You are also entitled to convey for disposal small electronic waste products with dimensions of less than 25cm to the premises of electronic retail outlets with sales areas of at least 400m², free of charge and without any obligation to buy. Appropriate differentiated waste collection for the subsequent recycling of the discarded equipment, its treatment and its environmentally compatible disposal helps to avoid possible negative effects on the environment and on health and favours the re-use and/or recycling of the materials it is made of.

Tones

N°	Name	Description	EN54-3 approved	DIP switch												
0	Silence	No tone		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
1	ISO 8201 2800Hz	 2800Hz, (0.5sec ON / 0.5sec OFF) x3 / 1sec OFF		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
2	ISO 8201 1000Hz	 1000Hz, (0.5sec ON / 0.5sec OFF) x3 / 1sec OFF	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
3	1KHz/800Hz 2Hz	 (1000Hz + 800Hz) x 0.5sec		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
4	NEN 2575:2000 (Dutch slow whoop)	 (500Hz + 1200Hz) x 3.5sec / 0.5sec OFF	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
5	SIN 1000Hz	 1000Hz	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
6	SIN 2800Hz	 2800Hz		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
7	Fast whoop (AS1670)	 (500Hz + 1200Hz) x 0.5sec / 0.5sec OFF	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
8	1000Hz 1sON/1sOFF	 1000Hz, 1sec ON / 1sec OFF		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
9	800Hz 0.2/1s	 800Hz, 0.2sec ON / 1sec OFF		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
10	800-1KHz 1Hz	 (800Hz + 1000Hz) x 1sec	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
11	AFNOR NF S 32 001	 550Hz, 0.1sec / 440Hz, 0.4sec		<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																
12	AS 1670 Alert	 420Hz, 0.625sec ON / 0.625sec OFF	✓	<table><tr><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td></tr></table>	1	2	3	4	ON				OFF			
1	2	3	4													
ON																
OFF																

N°	Name	Description	EN54-3 approved	DIP switch															
13	AS1670 Evacuation	 ((500Hz + 1200Hz) x 0.5sec / 0.5sec OFF) x3 / 1.5sec OFF	✓	<table><tr><td></td><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td><td></td></tr></table>		1	2	3	4	ON					OFF				
	1	2	3	4															
ON																			
OFF																			
14	DIN 33 404	 (1200Hz + 500Hz) x 1sec	✓	<table><tr><td></td><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>ON</td><td></td><td></td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td><td></td><td></td></tr></table>		1	2	3	4	ON					OFF				
	1	2	3	4															
ON																			
OFF																			

N°	Name	Sound level (dB@ 1m)	Absorption, low volume (mA)	Absorption, high volume (mA)
0	Silence	0	0	0
1	ISO 8201 2800Hz	87.4	95.9	5
2	ISO 8201 1000Hz	87.4	95.9	2.6
3	1KHz/800Hz 2Hz	77	87	2.2
4	NEN 2575:2000 (Dutch slow whoop)	88.5	94.4	2.5
5	SIN 1000Hz	87.9	95.9	2.7
6	SIN 2800Hz	88	98	2.86
7	Fast whoop (AS1670)	87.2	93.4	5
8	1000Hz 1sON/1sOFF	77	87	2.5
9	800Hz 0.2/1s	77	87	2
10	800-1KHz 1Hz	87.3	94.2	1.7
11	AFNOR NF S 32 001	76	85	2.7
12	AS 1670 Alert	79.9	88.6	1.4
13	AS1670 Evacuation	87.1	93.2	1.6
14	DIN 33 404	88.0	93.5	3

