

**MODULAR  
LINE**




	<b>MODULAR 200</b>	<b>MODULAR 300</b>	<b>MODULAR 400</b>	<b>MODULAR 500</b>	<b>MODULAR 800</b>
Max fog emitted in single shot	200 m <sup>3</sup>	300 m <sup>3</sup>	400 m <sup>3</sup>	500 m <sup>3</sup>	800 m <sup>3</sup>
Maximum shooting time	28 sec.	40 sec.	46 sec.	48 sec.	64 sec.
Max fog emitted with full fog bag	850 m <sup>3</sup>	900 m <sup>3</sup>	1275 m <sup>3</sup>	1275 m <sup>3</sup>	1700 m <sup>3</sup>
Pump	<b>FOG STORM</b>	<b>FOG STORM</b>	<b>FOG STORM</b>	<b>FOG STORM</b>	<b>FOG STORM</b>
Fog tank capacity	500 ml	500 ml	750 ml	750 ml	1000 ml
Working time without mains power	Over 1 hour	Over 1 hour	Over 1 hour	Over 1 hour	Over 1 hour
Heating time	Around 1 hour	Around 1 hour	Around 2 hours	Around 2 hours	Around 2 hours
Vertical mounting	Yes	Yes	Yes	Yes	Yes
Horizontal mounting	Yes	Yes	Yes	Yes	Yes
Serial bus with standard protocol	Yes	Yes	Yes	Yes	Yes
Power consumption	37 W	37 W	48 W	48 W	48 W
Back up battery	2 Ah 12V	2 Ah 12V	2 Ah 12V	2 Ah 12V	2 Ah 12V
Electronic board	Compact	Compact	Compact	Compact	Compact
Cover	Plastic	Plastic	Plastic	Plastic	Plastic
Non-toxic fog certification	Yes	Yes	Yes	Yes	Yes
Standard European certifications	Yes	Yes	Yes	Yes	Yes
Heater	350W	350W	280 W	280 W	280 W
Shooting time programmable in seconds	Yes	Yes	Yes	Yes	Yes

**UR FOG**  
**FOG  
STORM**



**COMPACT ELECTRONIC BOARD**

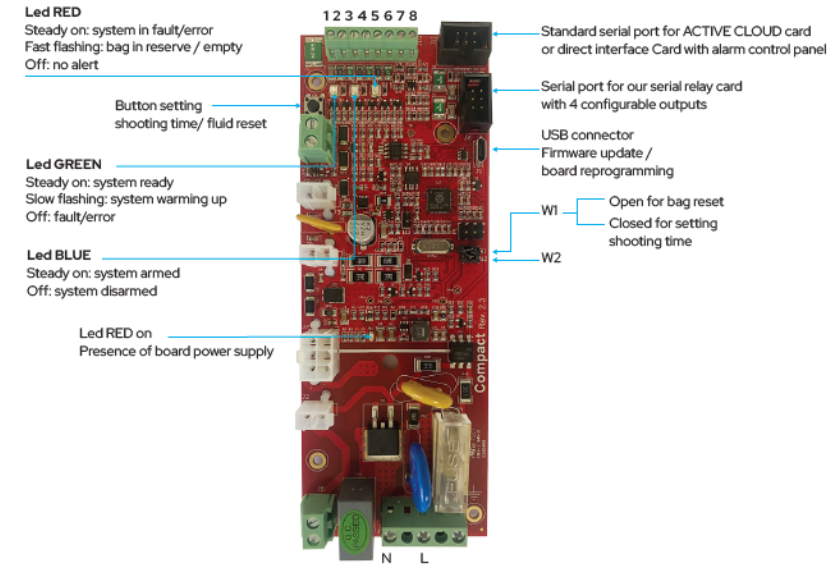

**OUTPUT**

- 1) 12VDC (max 300 mA)
- 2) 0V DC ground
- 3) If W2 is open:  
ARMING STATUS (active if armed)  
If W2 is closed: SHOOTING STATUS (active all the time of the shot)
- 4) ACTIVE if bag in reserve / empty
- 5) ACTIVE if system fault or errors present (battery flat or disconnected, power supply faulty or power failure)

**INPUT**

- 6) GDN input reference
- 7) ARMING command
- 8) SHOOT command