

ENERGIZER L92

Ultimate Lithium




Specifications

AAA

Classification:	"Cylindrical Lithium"
Chemical System:	Lithium/Iron Disulfide (Li/FeS ₂)
Designation:	ANSI 24-LF, IEC-FR03
Nominal Voltage:	1.5 Volts
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Typical Weight:	7.6 grams (0.3 oz.)
Typical Volume:	3.8 cubic centimeters (0.2 cubic inch)
Max Discharge:	1.5 Amps Continuous
(single battery only)	2.0 Amps Pulse (2 sec on / 8 sec off)
Max Rev Current:	2 uA
Typical Li Content:	Less than 1 gram
Typical IR:	140 to 180 milliohms (depending on method)
Shelf Life:	15 years at 21°C


Industry Standard Dimensions

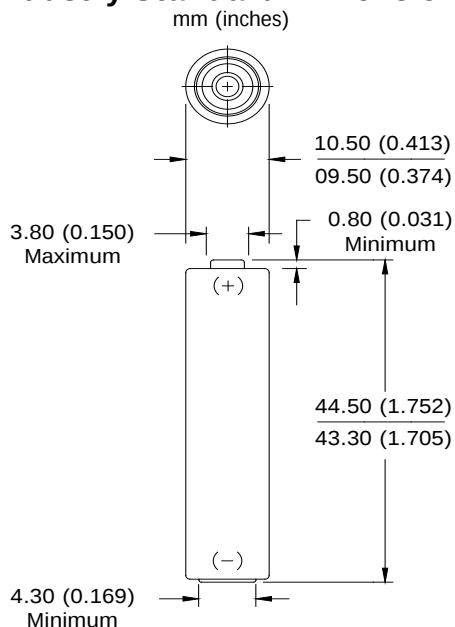

This battery has Underwriters Laboratories component recognition (MH29980)

Milliamp-Hours Capacity

Constant Current Discharge to 0.9 Volts at 21°C

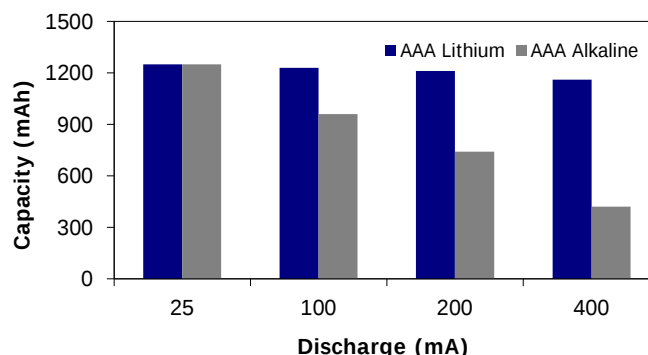


Milliwatt-Hours Capacity at Cold/Room Temperature

Constant Power Discharge to 1.0 Volts at 0°C and 21°C


Cold Temperature (0°C)

Constant Power Discharge

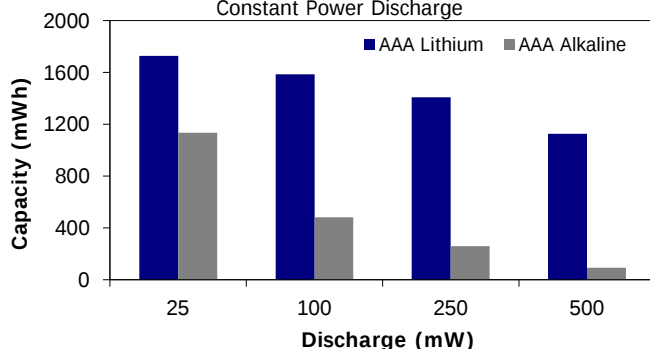

Room Temperature (21°C)

Constant Power Discharge

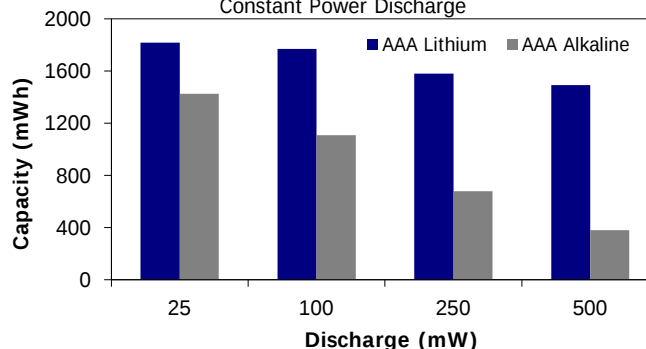

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.



©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER L92

AAA


Typical Discharge Curve Characteristics

Constant Current Discharge at 21°C (low and high drains)

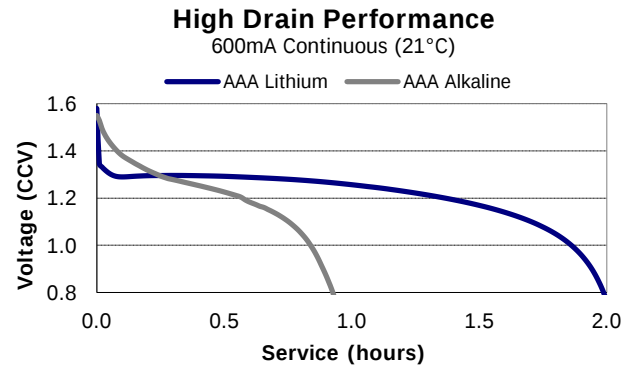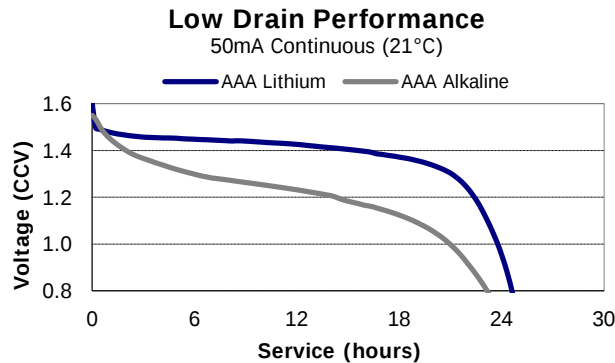


Constant Power Performance

Typical Characteristics to 1.0 Volts (21°C)


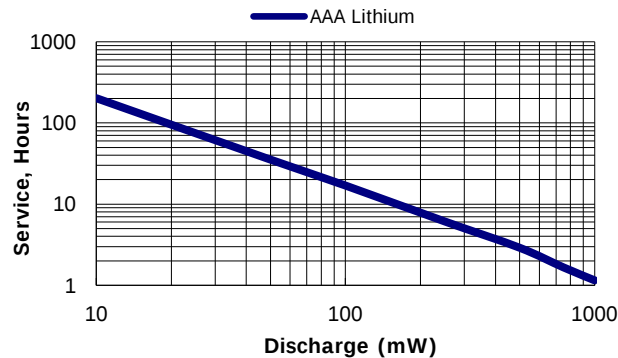


Constant Current Performance



Typical Characteristics to 1.0 Volts (21°C)

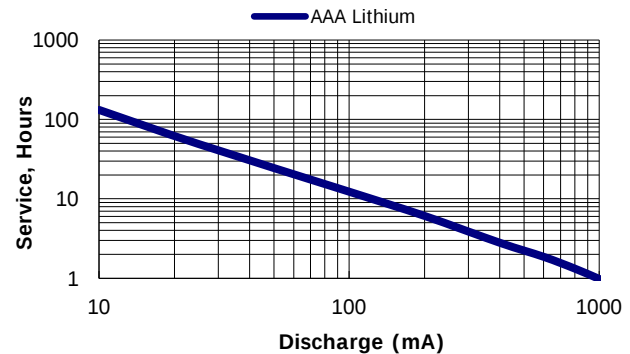

Application Tests (21°C)

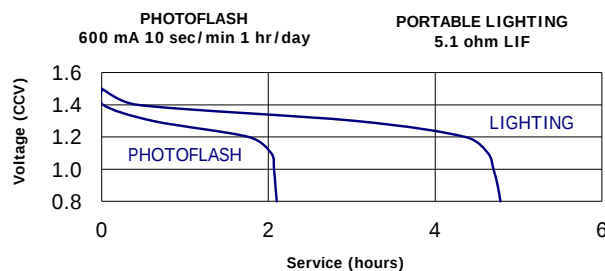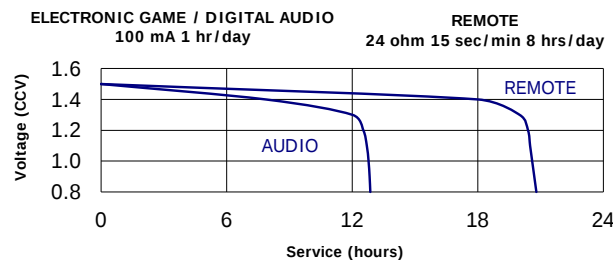

Industry Standard Tests (21°C)

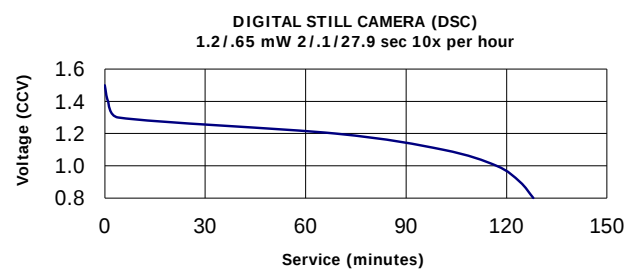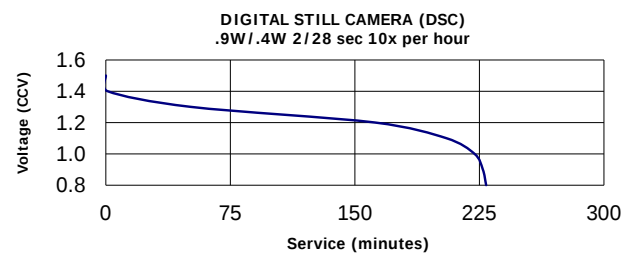

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.