

PREVIDIA-C-REP




EN 54-2
EN 54-4
EN 54-13
EN 54-21
EN 12094-1

0051
0051-CPR-1498
0051-CPR-1499


PREVIDIA | COMPACT

REMOTE REPEATER PANEL

Remote keypad with a neat, aesthetically pleasing design. It connects to a HORNET+ network (double RS485 connection) or to a LAN network, operates as a remote keypad for both Previdia Compact and Previdia Max control panels. It provides detailed information about the entire network, customizable display.

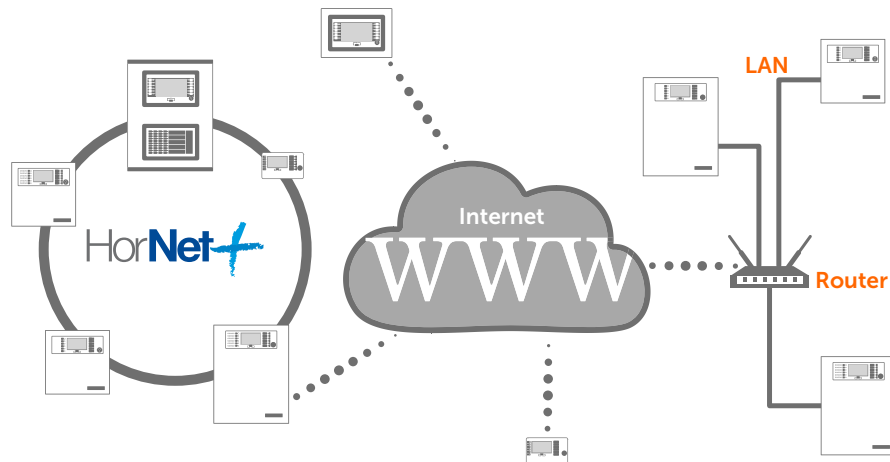


INSTALLATION

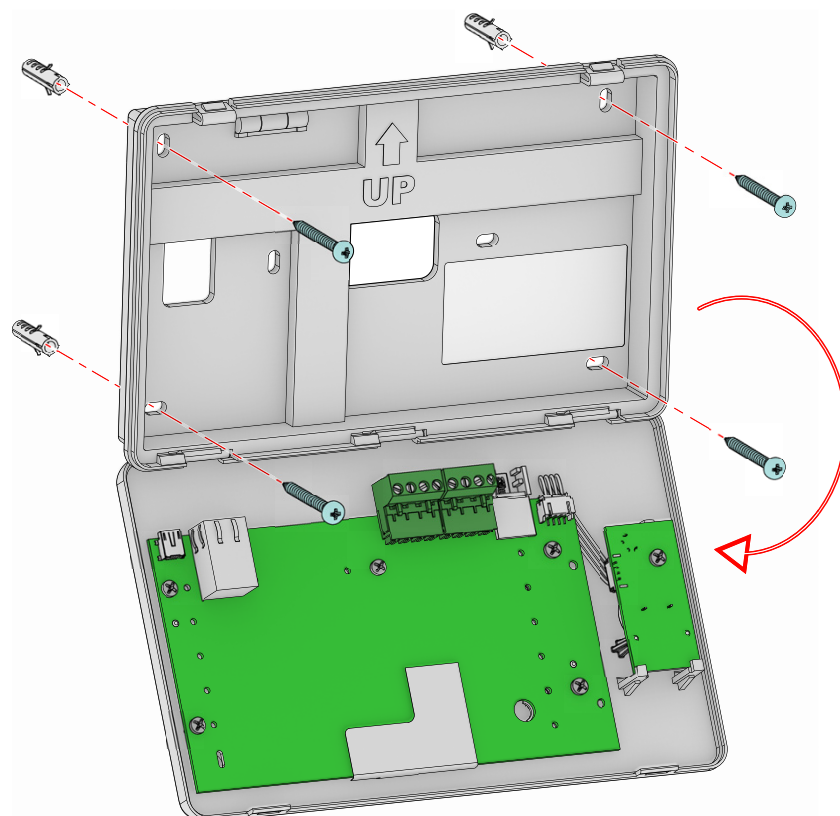

TECHNICAL SPECIFICATIONS

- Power supply voltage: 19 – 30 Vdc
- Stand-by current draw: 110mA
- Maximum current draw: 130mA
- Operating temperature: -5° .. +40° C
- Dimensions: 210 x 132 x 32mm
- Weight: 330g

CONFIGURATION DIAGRAMS

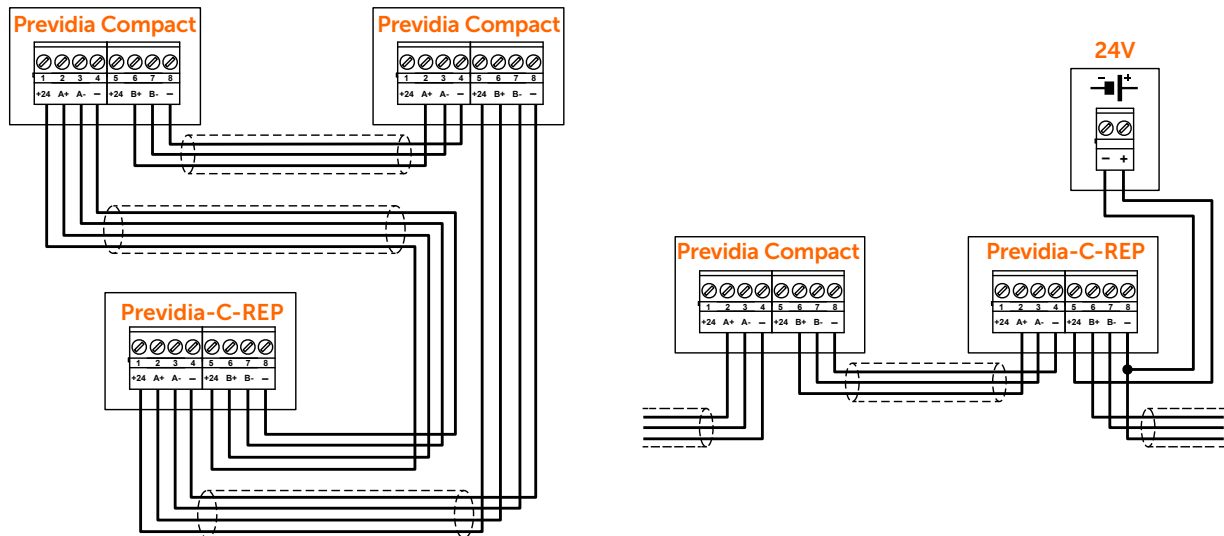

ORDER CODES

PREVIDIA-C-REPW
PREVIDIA-C-REPEW
PREVIDIA-C-REPR
PREVIDIA-C-REPER
PREVIDIA-Cxyz

base version. Plastic color white.
version with extinction display. Plastic color white.
base version. Plastic color red.
version with extinction display. Plastic color red.
analog addressable networkable fire detection control panel