


SCS6U LITE Cat.6 cable U/UTP 4 pairs AWG24/1 LSZH Indoor, Dca

Category 6, Unscreened, 4 pairs, LSZH, Indoor.

W5UX04LID, Rev.00, Date 2026-04-09

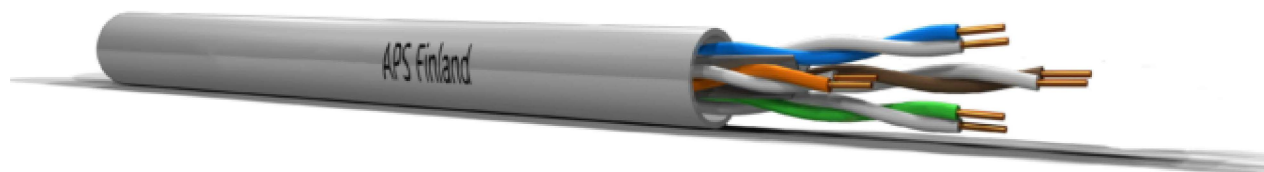

Standards of reference and applications

Indoor LAN horizontal cabling

Recommended max Permanent Link: 80 m

ANSI/TIA-568.2-D, ISO/IEC 11801, EN50173-1 Class E, 250MHz 1GbE

Installation Features

Store at: -0 to +50 °C

Install at: -0 to +50 °C. **Bend minimum:** 60 mm.

Operate at: -20 to +60 °C. **Bend minimum:** 75 mm.

Pull maximum: 40N

Design

Conductor: solid bare copper AWG24 (0.51mm)

Insulation: polyethylene Ø 0.89 ± 0.05 mm

Pair: 2 insulated conductors stranded together

Central cross: HDPE

Assembling: no 4 pairs assembled together around the central cross

Outer jacket: grey LSZH material

Marking: APS LITE CAT6 U/UTP 4PR 24AWG – ISO/IEC 11801 ANSI/TIA-568.2-D – EN 50575 CPR Dca-s2,d2,a1 – Lot xxxxx – xxx m

Colour code

- 1. Blue-white/blue
- 2. Orange-white/orange
- 3. Green-white/green
- 4. Brown-white/brown

Environmental properties and Fire Performances

CPR Class: Dca-s2,d2,a1
Declaration of Performance: W5UX042LID-001
Flame retardant: IEC 60332-1-2
Smoke Emission and Halogen Free: EN61034-2, EN60754-2
RoHS: 2011/65/EU
REACH: EC 1907/2006

Electrical characteristics

Conductor resistance: ≤ 95 Ω/km
Insulation resistance: ≥ 500 MOhm/km
Mutual Capacitance: ≤ 56 pF/m
Capacitance unbalance pair/pair: ≤ 330 pF/100m
Average characteristic impedance: 100 ± 15 Ω @ 100-250MHz
Velocity of propagation (NVP): 69%
PoE: 90W 4PR IEEE 802.3bt (Type 4)

Frequency (MHz) :	1	4	8	10	16	20	25	31.25	62,5	100	200	250
Return Loss	19.1	21.0	21.0	21.0	20.0	19.5	19.0	18.5	16.0	14.0	11.0	10.0
Attenuation (dB/100m)	3.0	3.5	5.0	5.5	7.0	7.9	8.9	10.0	14.4	18.6	27.4	31.1
Delay (ns)	570.0	552.0	546.7	545.4	543.0	542.1	541.2	540.4	538.6	537.6	536.5	536.3
NEXT (dB)	65.0	64.2	59.4	57.8	54.6	53.1	51.5	50.0	45.1	41.8	36.9	35.3
PS-NEXT (dB)	62.0	61.8	57.0	55.5	52.2	50.7	49.1	47.5	42.7	39.3	34.3	32.7
ELFEXT (dB/100m)	64.2	52.1	46.1	44.2	40.1	38.2	36.2	34.3	28.3	24.2	18.2	16.2
PS-ELFEXT (dB/100m)	61.2	49.1	43.1	41.2	37.1	35.2	33.2	34.3	28.3	24.2	18.2	16.2

Edit

Ordering and delivery information

Pair count	P/N	O.D [mm]	Weight [kg/km]	Retail Packaging	Wholesale Packaging	Sähkönumero	EAN
4 pairs	W5UX042LIDS30	5,5 ± 0,4mm	34,4	305 m (box) 39x39x22 cm 11.0 kg	9 150 m (pallet) 115x82x130 cm 346.0 kg	02 331 30	6430081401054

Every effort has been put so that this document is most reliable and free from errors. However, FSM Oy cannot be considered responsible for any mistake in this document and users should consult FSM Oy for any information needed. FSM Oy reserves the right to make changes to the documents at any time, without prior notice.