




RA19 Network Cabinet Frames 19" 42U, Floor Stand

Network Cabinet Frame, 19", Steel, Black

RA19FRB Rev.00, Date 2025-11-27

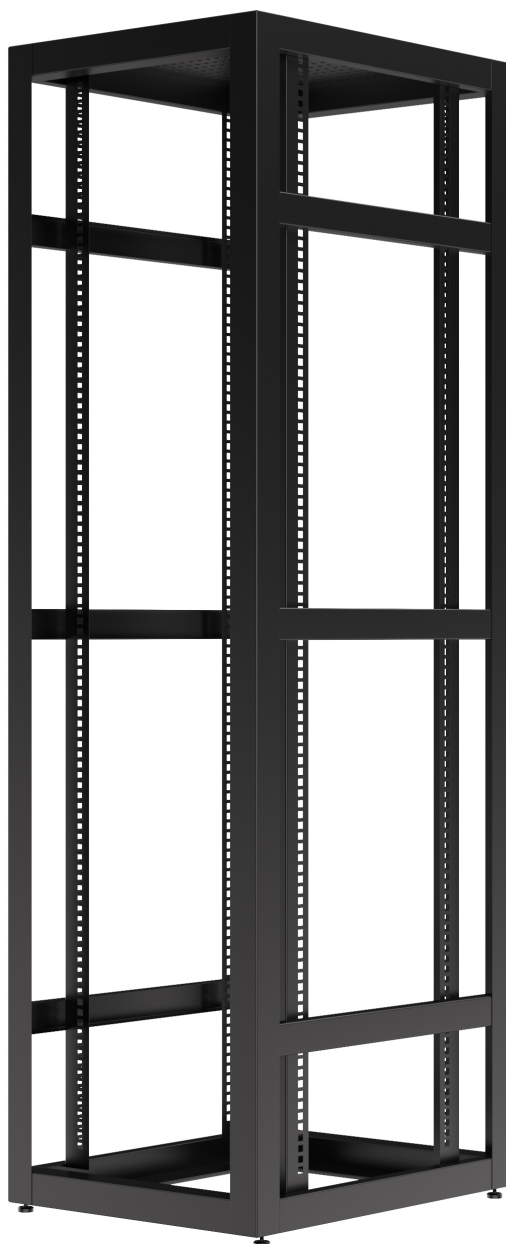

Description



Features

- 42U high
- 600, 800 or 1000 mm deep
- Black colour
- Heavy duty lockable casters available
- Large cut out in base for cable entry
- Full height front and rear adjustable 19" profiles
- 19" profiles marked with U height position
- Delivered assembled (flat pack upon request)

Standards of reference and applications

ANSI/EIA-310-E, IEC 60297-2, DIN 41494 Part 1 & 7.

Telecommunication, LAN, FTTx Cabling, CCTV.

Installation Features

Store at +10 to +50 °C

Install at 0 to +50 °C

Operate at : -10 to +70 °C

Design

Material: SPCC Cold Rolled Steel

19" rails: 2.0mm thick

Frame: 2.0mm thick

Colour: standard Black RAL9004 (optional grey)

Ordering and delivery information (assembled)

Unit count	Width	Depth	Height	Weight (kg)	Code	STK	GTIN	Delivery
42U	600	600	1980	80	RA196642FRB	7249343	6410072265742	Assembled
42U	800	800	1980	110	RA198842FRB	7249344	6410072357003	Assembled
42U	800	1000	1980	125	RA198142FRB		6410072493305	Assembled

Recommended connectivity

Patch panels for copper cabling : PPE24SU

Patch panels for fiber optic cabling : FOBOX24 series, ODF124 series.

Cable management : OHJPAN, MCRPAS1, MCRPAS2

Every effort has been put so that this document is most reliable and free from errors. However, FSM Oy cannot be considered responsible for any mistake in this document and users should consult FSM Oy for any information needed. FSM Oy reserves the right to make changes to the documents at any time, without prior notice.